





PD-4225S

| MODEL | SCREEN SIZE | HEIGHT | WIDTH | DEPTH | WEIGHT | POWER CONSUMPTION | FINISH |
|--------------------------------|------------------------|---------|---------|---------|----------|-------------------|----------------|
| PD-4225S (w/ speakers & base) | 42" diagonal, viewable | 27-5/8" | 49-5/8" | 10-7/8" | 81.7 lbs | 400 Watts | Hi-Tech Silver |
| PD-4225S (w/o speakers & base) | 42" diagonal, viewable | 26" | 40-3/4" | 4-3/8" | 65.2 lbs | 400 Watts | Hi-Tech Silver |

FRONT PANEL: PD-4225S

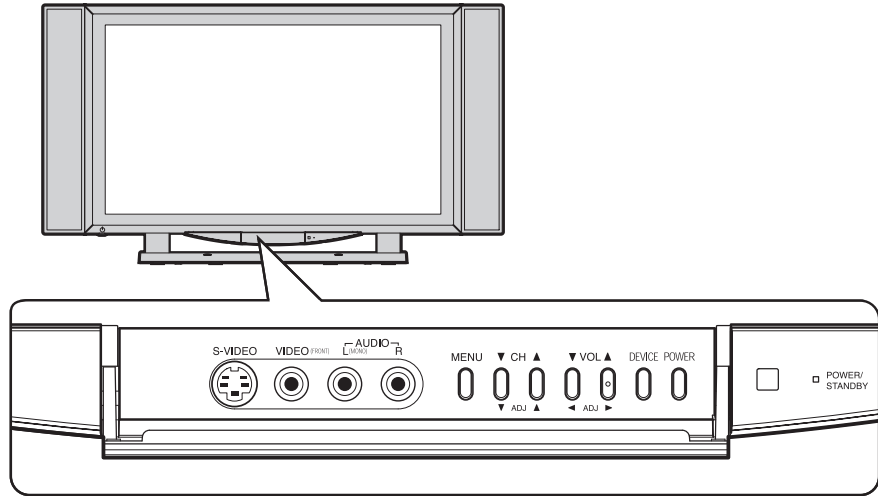

BACK PANEL: PD-4225S

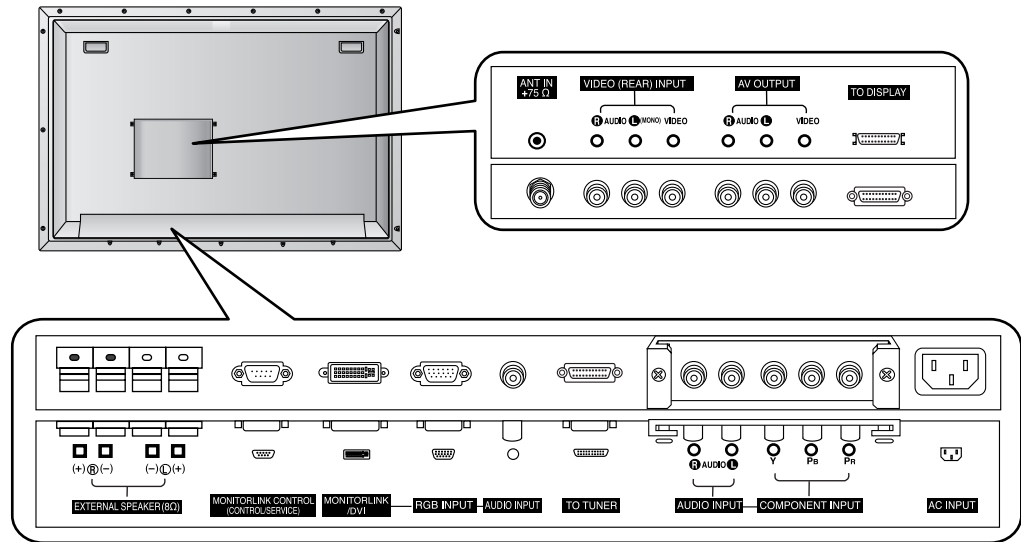

| DISPLAY | PD-4225S |
|-------------------------|---|
| Screen Size | 42" diagonal, viewable |
| Aspect Ratio | Widescreen 16:9 |
| Pixel Array | 852 Horizontal x 480 Vertical |
| Pixel Pitch | 1.08mm x 1.08mm (square pixels) |
| Contrast Ratio | 1000:1 |
| Peak Brightness | 1000cd/m2 |
| Horizontal Scan Range | 15.5kHz - 68.7kHz |
| Vertical Scan Range | 56Hz - 120Hz |
| SCAN RATE COMPATIBILITY | |
| Analog Video | NTSC |
| Digital TV | 480i, 480p, 720p, 1080i (ATSC, USA) |
| PC Monitor | VGA, SVGA, XGA, SXGA, (4:3 formats) W-XGA (16:9 format) |
| VIDEO PERFORMANCE | |
| Comb Filter | Motion-Adaptive 3D Y/C |
| Film Mode | 3:2 pulldown compensation |
| Color Temperature | High, Medium, Low and user programmable settings |
| Format Modes | Standard, Narrow, Stretch, Expand |
| Zoom Mode | Yes |
| Multi-Image Modes | PIP |
| USER INTERFACE | |
| AV Picture | Brightness, Contrast, Color, Tint, Sharpness, Color Temperature |
| Digital Noise Reduction | Yes (switchable) |
| Monitor Adjustments | V-Position, H-Position, V-Height, H-Width |
| Menu Languages | English, French, Spanish |
| INPUTS | |
| Analog Video | 2 composite, 1 S-video, plus stereo audio) |
| Digital TV | 1 (component video, plus stereo audio) |
| PC Monitor | 1 (mini D-Sub15, with stereo audio) |
| MonitorLink™ | 1 (proprietary Mitsubishi digital interface) |
| OUTPUTS | |
| Audio | 2 x 5 Watts, 50Hz - 20kHz, 1% THD into 8 Ohms |
| REMOTE CONTROL | |
| Dedicated, IR | Yes |

• Descriptions and specifications are subject to change without notice. Please visit www.mitsubishi-tv.com for information regarding product changes. Dimensions shown are approximate, not exact, and are not intended for custom installation purposes. Custom installers should take and use exact measurements from the unit to be installed. Custom installations should also allow for air circulation and ventilation. Cosmetic appearances of products may vary from that depicted here.
©Copyright 2003-2004 Mitsubishi Digital Electronics America, Inc.