



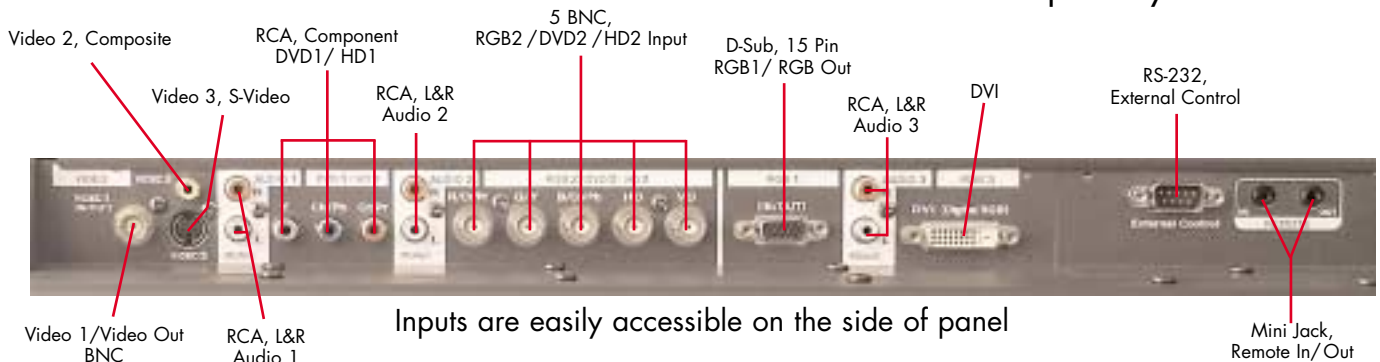

## Plasma Display Panel Model P42A2

### Key Features

- 42 Inch display
- 1024 x 768 resolution
- Outstanding image processing
- Built-in stereo amplifier
- Quiet operation
- Digital zoom, up to 300%
- 16:9 aspect ratio
- 160° viewing angle
- Portrait capability

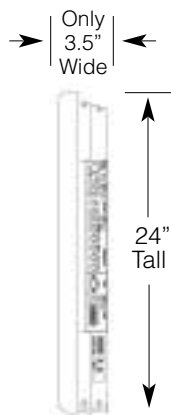


**P42A2**  
**DUKANE**

## Plasma Display Panel P42A2

Dukane P42A2 plasma display produces stunning images in a native 1024 x 768 format. The color filter technology provides extremely realistic and saturated colors as well as enhanced contrast.

The P42A2 delivers superb image quality from any source. Advanced scan conversion and 3/2 pull down processing, delivers smooth, lifelike video. A patented color filter ensures realistic color.

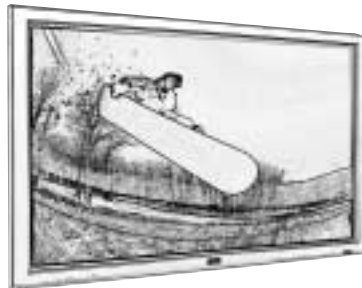

Connect to multiple sources from video to HD to your computer. Signal loop-through capability allows a source to easily be looped from one monitor to the next enabling you to connect 4 displays without the use of an external distribution amplifier (DA)\*.

Digital zoom allows you to select any portion of the screen and magnify it to emphasize a point or highlight information. Zoom up to 300% with a push of a button from the remote control.

A sleek new design, programmable timer and portrait capability make the P42A2 the perfect choice for any environment.

### **Key features:**

- 42 Inch display
- 1024 x 768 resolution
- Outstanding image processing
- Built-in stereo amplifier
- Quiet operation
- Digital zoom, up to 300%
- 16:9 aspect ratio
- 160° viewing angle
- Low power consumption
- Portrait capability
- Programmable timer

\* Signal DA is required for sending a signal to more than 4 monitors simultaneously.

# **DUKANE**

Dukane Corporation  
Audio Visual Products Division  
2900 Dukane Drive  
St. Charles, Illinois 60174  
800-676-2485 or 2486  
630-584-5156  
avsales@dukcorp.com  
www.dukcorp/av.com



toll-free  
fax  
e-mail

## **Specifications P42A2**

Display, diagonal	42 inches
Display, area	36.3" (H) x 20.4" (V)
Resolution, pixels	1024 (H) x 768 (V), XGA
Video Compatibility	NTSC, PAL, SECAM, HDTV 1080i, 1035i, 720p, 625i/p, 540p, 525i/p, 480i/p
Aspect Ratio	16:9
Number of Colors	16.7 million
Contrast Ratio	650:1
Brightness	380cd/sq m
Viewing Angle	160 degrees
Image Features	Portrait/Landscape Mode, Zoom
Computer Compatibility	VGA, SVGA, XGA, SXGA, UXGA, WVGA, WXGA
Scanning Frequency	fh 15.5-110 kHz, fv 50-120 Hz
Inputs, Computer	15-pin mini D-sub (shared) 5 BNC (RGB/HV) (shared) 29-pin DVI
Inputs, Video	Composite BNC x 1 Composite RCA x 1 S-Video 4-pin DIN RCA Component (Y,Pb,Pr,Y,Cb,Cr) BNC Component (shared) (Y,Pb,Pr,Y,Cb,Cr)
Inputs, Audio	RCA Stereo x 3
Output, Computer	15 PIN mini D-sub (shared)
Output, Video	Composite BNC
Audio	Internal Amplifier, 8W x 2 output power
Control	9-pin mini D-Sub, RS232, Wired remote(In/Out)
Operating Temperature	32-104 degrees F (0-40 degrees C) (20-80% operating humidity)
Power	120V 50/60 Hz, 350W (typical), 0.9W (standby)
Weight	65 lbs.
Size (W x H x D)	40.1" x 24" x 3.5"
Shipping Weight	95 lbs.
Carton Size	16" x 33" x 51"
Safety	FCC Class A, UL Approved
Accessories Included	Power Cord, User Manual, Remote Control, Batteries, Cable Clamps
Optional Accessories	Tabletop Stand (PX-ST1U), Attachable Speakers (PX-42SP1U) Terminal Cover (PX-CV1U) Fixed Wall Mount (FWMK) Tilt Wall Mount (TWMK) Ceiling Mount (CMK) Fixed Wall Mount for PC (FWMKPC) Tilt Wall Mount for PC (TWMKPC) Ceiling Mount for PC (CMKPC) Stand Plug (PX-PL1U)

One (1) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply).

# **TYR**