

## Fujitsu Plasmavision SlimScreen® P42HHA30WS 42" High Resolution Plasma Monitor



**Introducing the Fujitsu P42HHA30WS Plasmavision SlimScreen® monitor.** As part of Fujitsu's newest line of high resolution Plasmavision SlimScreen monitors, the P42HHA30WS provides the ultimate viewing experience. Its sleek and lightweight design allows it to be hung on a wall or placed on a stand to seamlessly integrate into any home theater system. Superior picture quality and natural color display combine with high resolution to transport you to far away places. Whether you're watching a sporting event or your favorite television program, images look so real you'll feel like you're actually there.



- High resolution 1024 x 1024 pixel display
- AVM digital video processor
- 16:9 widescreen aspect ratio
- 160° viewing angle
- Slim and lightweight at 3.3" thin\* and 66 pounds
- Wide range of inputs - SDTV, DTV and HDTV signals
- PC input - both MAC and Windows compatible

# 42" High Resolution Plasmavision® P42HHA30WS

## BRILLIANT COLOR DISPLAY

Using a new 10-bit processing system, the P42HHA30WS produces over 1.07 billion colors to represent on-screen images in their natural color. High brightness and an amazing contrast ratio combine for a brilliant picture display, regardless of room brightness.

## PICTURE PERFECT

The P42HHA30WS boasts a DVI-D digital input with HDCP, which provides a direct digital connection to the latest hi-end video devices – such as a satellite system or an HDTV set-top box – to provide crystal-clear high definition digital images.

## SLEEK AND STYLISH

Just 3.3" thin\*, and 66 pounds, the P42HHA30WS is great for custom installations in a wide variety of home theater applications.

## CONVERGENT VISUAL MEDIUM

An expanded complement of input terminals for component video, S-video, composite video and analog RGB allow for complete convergence.

## IT'S WHAT'S INSIDE™

Fujitsu General has developed the AVM (Advanced Video Movement) digital video signal processor, which virtually eliminates motion artifacts and flicker, improves vertical resolution and reproduces natural movement with ease. The processor's built-in line doubler converts NTSC signals and uses different types of processing for moving and still pictures, yielding smoother images with more natural movement and without visible scan lines.


## ACCESS AT YOUR FINGERTIPS

A greater range of picture adjustments is accessible via the improved on-screen menu and supplied remote control. From your seat you can adjust volume and color temperature, select an input source and more!


## AWARD WINNING

Since introducing our first plasma display monitor in 1993, Fujitsu Plasmavision SlimScreens have won many awards, including the 2002 Emmy Award for outstanding achievement in technological advancement.

## Specifications P42HHA30WS

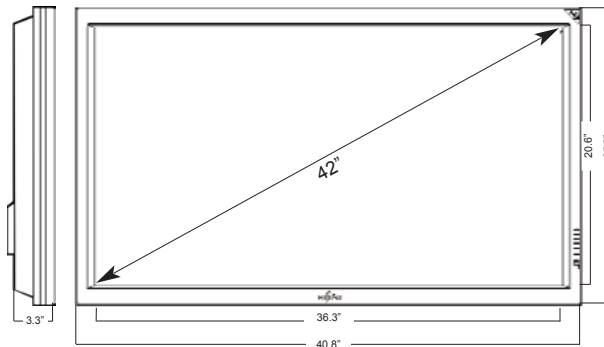

### Input / Output Array

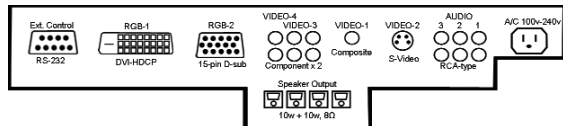

### Optional Accessories

- Desktop Stand, P-TT4200-S (adds 2.3" to panel height indicated above)
- Wall Mount Bracket, P-50XP1-B (adds 2.25" to panel depth)
- Ceiling Mount Bracket, P-CT4200-B
- Matching Speakers (pair), P-SP4200-S (each speaker 4" W x 25.3" H x 3.3" D)

### Warranty



Three Year Warranty  
on Parts and Labor.

Warranty includes parts & labor and one year on plasma display element.

Display Type	AC-type plasma display panel
Screen Size	36.3" W x 20.6" H (42" diagonal)
Dimensions	40.8" W x 25.3" H x 3.3" D*
Weight	66.14 lbs
Pixel Count	1024 x 1024 rectangular
Contrast Ratio	1000:1
Aspect Ratio	16:9
Displayable Colors	1.07 billion colors
Video Standards Supported	NTSC, PAL, SECAM, M-PAL, N-PAL, 4.43NTSC, PAL-60
Video Inputs	Video x 1, s-terminal x 1, component x 2
Audio Inputs	RCA terminal (L/R) x 3 sets, 0.5 Vrms
Computer Inputs	RGB 15-pin x 1
Digital Interface	DVI-D (HDCP) x 1
Viewing Angle	160 degrees
Horizontal kHz	15.62 - 80.00
Vertical Hz	50.0 - 120.0
Power Source	110 - 240 V, AC 50/60 Hz
External Control	RS-232C
Operating Temperature	32°F to 104°F
Relative Humidity	20 to 90 percent (not condensing)
EMC Regulations	FCC part-15 Class B, ICES-003 Class B, AS/NZS3548 Class B, EN55022 Class B
Safety Regulations	UL 6500, CSA22.2 No. 950 (C-UL), EN60065, IEC60065

\* This is the depth of the main set cabinet. A small input housing adds 0.5" for a total depth of 3.8". This housing does not affect mounting depth when using the Fujitsu P50XP1-B accessory wall bracket.

Specifications are subject to change without notice for further improvement.



Fujitsu General America, Inc. • 353 Route 46 West • Fairfield, NJ 07004  
Tel: (888) 888-3424 • Fax: (973) 575-2194  
www.plasmavision.com