



42" LCD MONITOR

LDT422V


- ADVANCED HIGH-DEFINITION DIGITAL SIGNAGE DISPLAY
- FULL HD 1920 X 1080 NATIVE RESOLUTION
- HIGH QUALITY IMAGE FOR VIRTUALLY ANY APPLICATION
- MULTIPLE SCREEN SAVER FUNCTION
- PROGRAMMABLE SCHEDULING

LEADING THE EVOLUTION OF
HIGH-DEFINITION
DIGITAL SIGNAGE

42" LCD MONITOR LDT422V



MULTIPLE STANDARD INPUT AND OUTPUT CONNECTORS

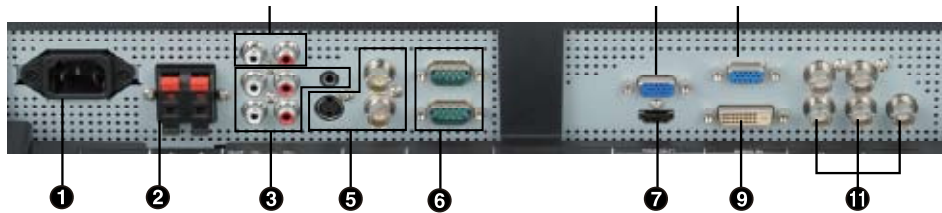

- ❶ AC In (3 Pin, with earth terminal)
- ❷ External Speaker Terminal
- ❸ Audio In
- ❹ Audio Out (RCA)
- ❺ Video Input/Output (BNC/S-Terminal)
- ❻ RS-232C Connector (D-sub 9 Pin)
- ❼ RGB 1 In (HDMI)
- ❽ RGB Out (Mini D-sub 15 Pin)
- ❾ RGB 2 In (DVI-D)
- ❿ RGB 3 In (Mini D-sub 15 Pin)
- ⓫ RGB 4 In, DVD/HD In (BNC)

CLASS	42" (Diagonal) LCD Monitor
VIEWABLE IMAGE SIZE	36.6" x 20.6"
NATIVE RESOLUTION	1920 x 1080 (Full HD)
ORIENTATION	Landscape / Portrait
BRIGHTNESS/LUMENS	500 cd/m ²
PIXEL PITCH	0.485 mm
CONTRAST RATIO	1300:1
DIMENSIONS (W x H x D in.)	40.24" x 24.2 x 5.2" (without stand)
WEIGHT (WITHOUT STAND AND SPEAKERS)	45 lbs. (Net)
BEZEL WIDTH	1.7"
RESPONSE TIME	9 ms (gray to gray)
VIEWING ANGLE	Horizontal and vertical: 178°
VIDEO/AUDIO INPUTS AND OUTPUTS	mini D-Sub 15 pin In/Out, HDMI, DVI-D, BNC (R,G,B,H,V), S-Video, Composite (RCA), Component (BNC), Audio LR (RCA), Audio Stereo mini jack
SPEAKER OUTPUT	External Speaker Jack
CONTROL INPUT/OUTPUT	RS232C (mini D-Sub 9 In/Out)
POWER CONSUMPTION (WITHOUT SPEAKERS)	182 W
ESTIMATED BACKLIGHT LIFE	Up to 50,000 hours*
AUDIO SPEAKER	Optional: SP-422V
TABLE STAND	Optional: ST-422V
WALL MOUNT COMPATIBILITY	12 holes (100mm / 3.94" pitches) for monitor mount
WARRANTY	3-years parts and labor, Express Replacement Assistance, toll-free 24x7 technical support

*Results may vary depending on usage and operating environment