



# RU-42PX10C

42" EDTV INTEGRATED PLASMA DISPLAY



SHOWN WITH  
INTEGRATED STAND  
AND SPEAKERS

#### 852 x 480p Resolution

High resolution format produces extremely detailed imagery

#### 5000:1 Contrast Ratio

Extremely sharp contrast between light and dark images

#### 1500 cd/m<sup>2</sup> High Brightness

Renders an incredibly bright picture, even in well-lit areas

#### Image Sticking Minimization, Pixel Orbitor, and White Wash Features

Reduce phosphor burn and prolong the life of the plasma

#### Aspect Ratio Correction

#### RS-232 Control and Discrete

#### IR Controls

#### Fan-Free Operation

#### Faroudja DCDi

Video de-interlacing and line doubling

#### XD Engine

#### Front Panel Control

#### Side Video/Audio Inputs

#### Integrated NTSC Tuner

#### Integrated Speakers


#### 2 Year Warranty

**XD**  
ENGINE


**EDTV**  
MULTIMEDIA CORPORATION

**DCDi**  
by FAROUDJA


## DIMENSIONS

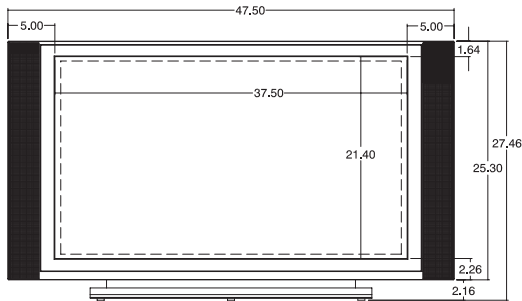

Front View

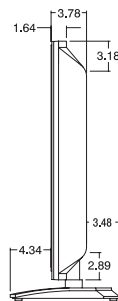

Side View

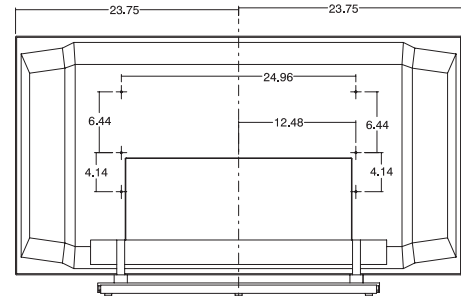

Back View

## DIMENSIONS

Cabinet with Stand (W x H x D)	47.5" x 27.5" x 11.6"
Weight	66 Lbs.

## CABINET DESCRIPTION

Finish	Silver
Cabinet Style	Slim Frame
Power Consumption	220W
Power Source	100 ~ 240v 60Hz

## VIDEO ENHANCEMENTS

Screen Size	42" Wide Format
Resolution Display	852 x 480p
Pixel Pitch	0.36 (H) x 1.08 (V)
Aspect Ratio	16:9, 4:3 Zoom
Brightness	1500 cd/m <sup>2</sup> w/Filter
Contrast Ratio	5000:1
Viewing Angle	160°
Format Conversion	Intelligent Image Scanning
Aspect Ratio Correction	Yes
Scan Converter	XD Engine
Contrast	Yes
Brightness/Sharpness	Yes
Tint	Yes
Video De-Interlacing/Line Doubling	Faroudja DCDi
Integrated NTSC	Yes
Open Cable Tuner	

## DISPLAY

Display Frequency	15.73 to 120Hz (H), 50 to 120Hz (V)
Displayable Colors	16.77M
Color Gradation Filter	Yes
Input Signal	NTSC, HD, SD, VGA, SVGA

## AUDIO ENHANCEMENTS

Mono/Stereo/MTS/SAP	Stereo
Bass/Treble/Balance	Yes
Total Audio (Watts) Output (Integrated Speakers)	20W (2 x 10W)

## SPECIAL FEATURES

Acoustic Noise Reduction	Yes
Picture In Picture (PIP)	Yes, Split Screen, Zoom
Trilingual Menus	English/Spanish/French
1 Level Mute	Yes
Shock Absorbing Glass Damper	Yes, Tilt to 20°
RS-232 Control	Yes
Discrete IR Controls	Yes
Detachable AV Terminal	Yes
White Balance Adjustment	Yes
Display Mode Change (Vertical)	Yes
Fan Free, Noise Free	Yes (Landscape Only)
Auto-Power On	Yes
Discrete Power Off	Yes
Last Source On	Yes
Image Sticking Minimization	Yes
Pixel Orbitor	Yes
White Wash	Yes
Inversion	Yes
Auto Program	Yes
Key Lock-out	Yes
Clock	Yes
Timer	Yes
Closed Caption	Yes
Parental Control	Yes

## OUTPUT RESOLUTIONS

NTSC, VGA, SVGA, XGA, SXGA	852 x 480p
EDTV	852 x 480p

## JACK PACK

Hi-Res Component Video	2
Audio Left/Right In	5
RF In	1
Composite In	2
RGB In (15-Pin Type-D Connector)	1
S-Video In	2
RS-232C (9-Pin Connector)	1
DVI with HDMI	1
IR Jack	1
Composite Video/Audio Out	1

## OPERATING ENVIRONMENTS

Storage Temperature Range	-20°C ~ 60°C
Storage Humidity Range	<85%
Altitude	Up to 2,000m (6561 Ft.)
Operating Temperature	0°C ~ 40°C & <80% Humidity

## REQUIRED APPROVALS

UL, C-UL, NOM	UL, C-UL, FCC (B)
---------------	-------------------

## SERVICE/LIMITED WARRANTY

Warranty: Parts/Labor	2 Year/2 Year
MTBF (Approx.)	60K Hours


## ACCESSORIES (SUPPLIED)

15-Pin RGB Cable	Yes - 15 Feet
Remote Control	Yes
Power Cord	Yes - 6 Feet
DVI Cable	Yes - 6 Feet


## ACCESSORIES (OPTIONAL)

Wall Mount	PWMT200
------------	---------

## SIDE JACK PANEL



## REAR JACK PANEL

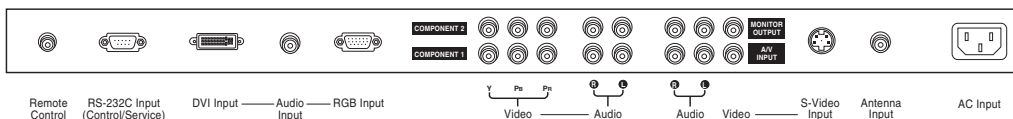

## www.LGcommercial.com

LG Electronics U.S.A., Inc. 2000 Millbrook Drive, Lincolnshire, IL 60069 Customer Service: 1-888-865-3026  
 Dimensions and weights are approximate. Design and specifications subject to change without notice. The "LG Life's Good" is a registered trademark of LG Electronics U.S.A., Inc. ©2004 LG Electronics U.S.A., Inc. Printed in the USA. LG4210C0804

