

32" LED Professional Display

Take Control of Hospitality and Entertainment Digital Signage

CDE3201LED



The ViewSonic® 32" CDE3201LED professional display features Full HD 1920x1080p WLED panel technology, professional connectivity and hospitality features. These features combined with its slim design and energy saving electronics makes the CDE3201LED an ideal solution for your business and entertainment needs. USB cloning enables users to duplicate calibration across multiple displays. Additional features include an RS-232 automated control port for easy on/off scheduling and IR pass through which allows for connectivity to a 3rd party set top box with its own remote. Additional features include versatile inputs featuring, HDMI, DVI, VGA, component video, and a USB multimedia port to play JPEG images and MP3 music.

32" Professional HD Display With Hospitality Features
The ViewSonic CDE3201LED is designed for use in public, retail and commercial signage installations.


- 32" Full HD 1920x1080p edge lit LED
- User programmable set up menu
- Automated control using RS-232 port
- I/R remote pass through and USB cloning for easy calibration duplication
- Energy-saving panel and system design
- USB media support input – JPEG images
- 3-year limited warranty

32" LED Professional Display

CDE3201LED

Applications

- Hospitality / Entertainment display
- Business / Educational display – boardroom and classroom
- Low cost digital signage – small to mid-size business
- Medical office and waiting room entertainment displays
- Hotel guest room entertainment
- Sports bar and restaurant entertainment displays

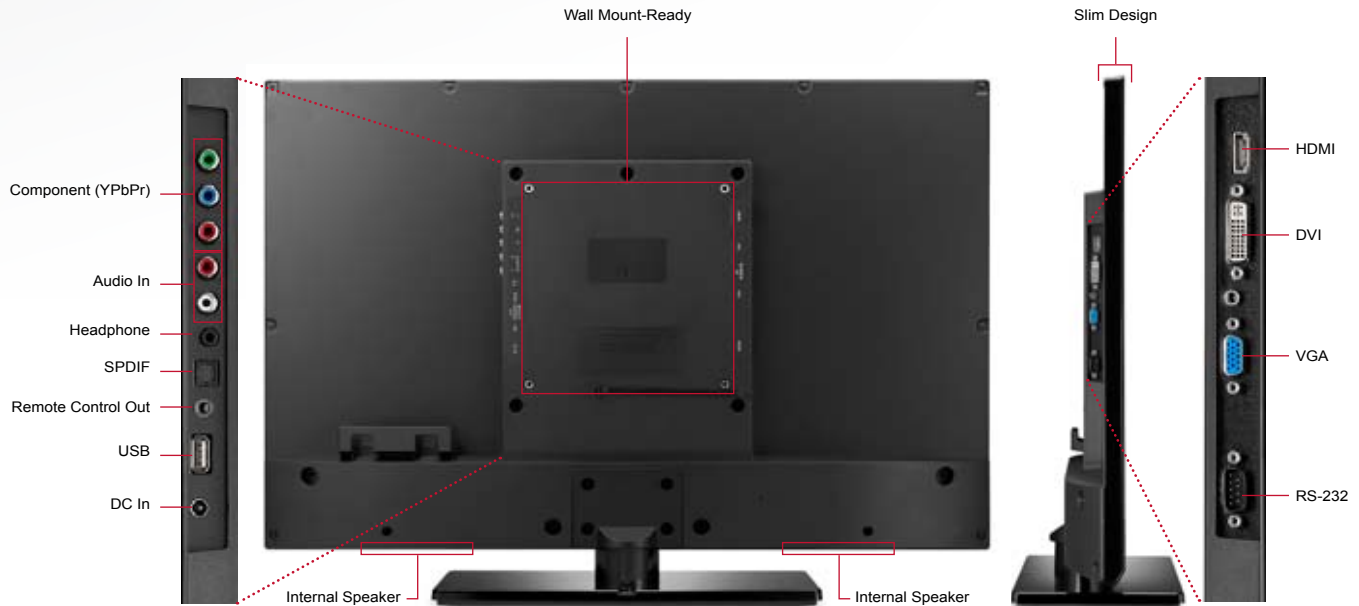

Optional Accessories

- Wall Mount..... WMK-013
- Wall Mount with Locking
- Media Player Cradle..... WMK-028

Specifications

LCD PANEL	Type	32" color TFT active matrix, wide LED
	Display Area	27.5" horizontal x 15.4" vertical; 32" diagonal
	Optimum Resolution	1920x1080, 600mm dot pitch
	Contrast Ratio	3000:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	8ms
	Light Source	Long life, 50,000 hrs. (typ)
	Brightness	300 cd/m ² (typ)
	Aspect Ratio	16:9
	Panel Surface	Anti-glare, hard coating (3H)
INPUT	Video Input	HDMI, DVI, component, VGA, CVBS
	Video Output	VGA, component
	Control Input/Output	RS-232
AUDIO OUTPUT	Speakers	Internal 5-watt (x2)
INPUT SIGNAL	TV/Video Comp.	480i, 480p, 720p, 1080i, 1080p
CONNECTOR	Analog	15-pin mini D-sub (VGA)
	Digital	HDMI, DVI, S-video YPbPr, CVBS
	Power	3-pin plug
POWER	Voltage	AC 100–240V (universal), 50–60Hz
	Consumption	51W (typ)
CONTROLS	Panel	Power, Exit, +, -, Menu/Enter
	Picture	Picture mode, contrast, brightness, color temperature, temperature adjust, sharpness
	VGA Setting	Auto adjustment, clock, phase, sharpness, H. position, V. position
	OSD Setting	Languages, OSD H. position, OSD V. position, OSD timer
	Input	VGA, DVI, HDMI, YPbPr
	Audio	Volume, mute, audio source
	Special	Aspect ratio, over scan, power save, image retention, auto adjustment, monitor ID, reset
	Diagnostic	Thermal, back light, ambient, 5V detect, 12 detect

OPERATING CONDITIONS	Temperature	32–104°F (0–40°C)
	Humidity	20–90% (non-condensing)
DIMENSIONS (W x H x D)	Physical With Stand	29.6 x 21.1 x 7.25 in. / 752.9 x 535.6 x 184.1 mm
	Physical Without Stand	29.6 x 19.25 x 2.4 in. / 752.9 x 489 x 60.5 mm
	Packaging	32.3 x 23.9 x 5.2 in. / 821 x 607 x 132 mm
WEIGHT	Net With Stand	16.6 lb. / 7.5 kg
	Net Without Stand	15.4 lb. / 7.0 kg
	Gross	20.1 lb. / 9.1 kg
WALL MOUNT	VESA®	200mm x 200mm
REGULATIONS		FCC, ICES003, UL, cUL, CE, CB, ENERGY STAR®, RoHS
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state or federal laws.
WARRANTY		Three-year limited warranty on parts, labor and backlight

What's in the box?

CDE3201LED Display, power cable, remote control with batteries, User Guide, Quick Start Guide



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.