


The dawning of a new
Champion

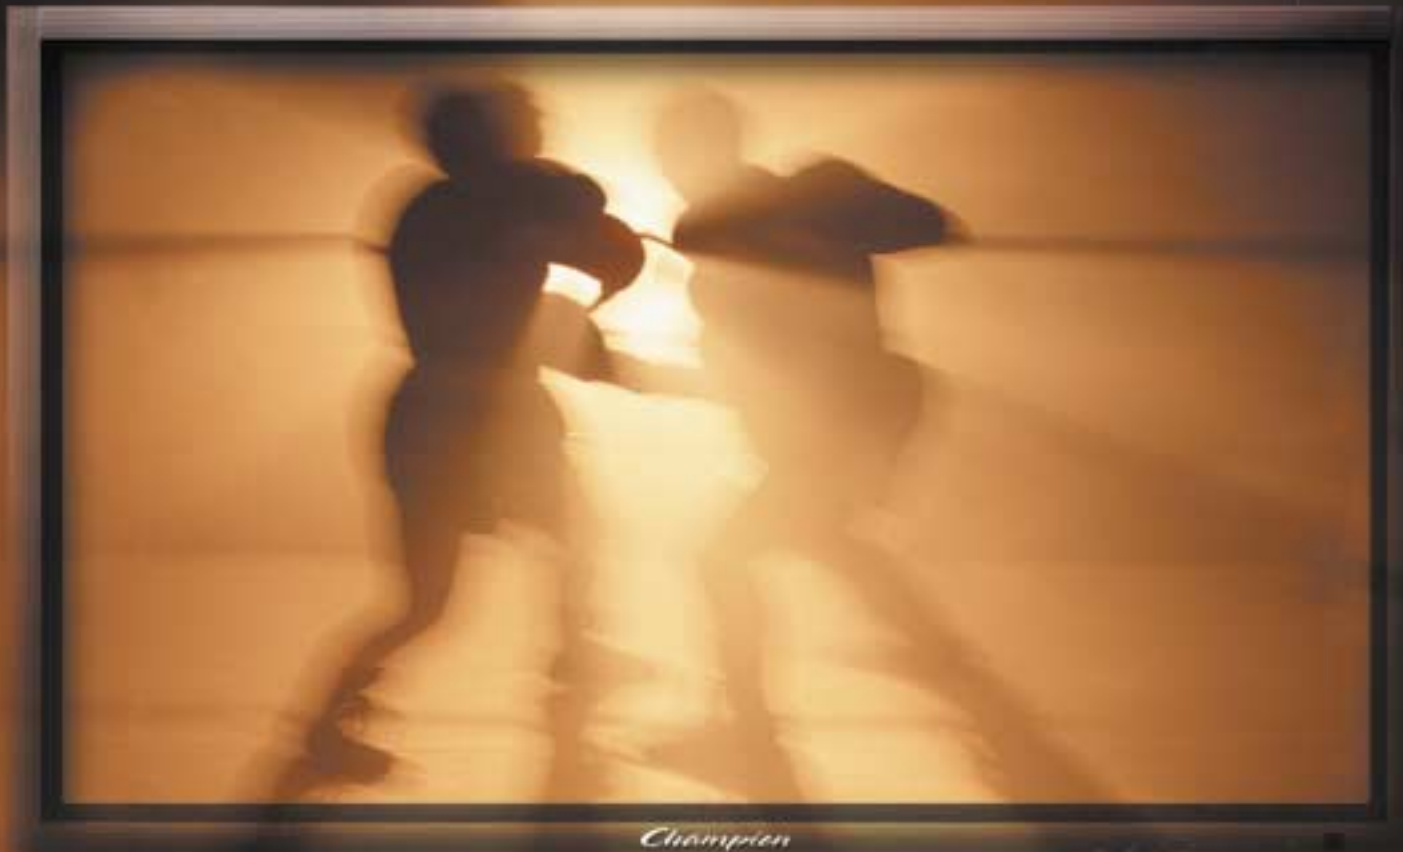

Ladies and
Gentlemen ...

In this corner, a vision of greatness,
the 42CVI Plasma Display from
Champion Vision Inc. Exclusively
distributed by the nation's leader
in Display Technology Solutions...
Electrograph Systems, Inc.

CHAMPION 42CVI
42" PLASMA DISPLAY

- 16:9 Aspect Ratio
- 4000:1 Contrast Ratio
- 780 cd/m² Brightness
- EDTV Compatible
- Picture in Picture
- Side by Side

Champion

Vision is our middle name.

Champion

Vision is our middle name.

Witness the dawning of a new Champion. The **42CVI Plasma Display** from Champion Vision Inc. is truly a world-class contender. Both HDTV and PC compatible, the 42CVI is packed with all the power and punch of a true heavyweight. Produced with state-of-the-art engineering and components, the Champion 42CVI incorporates advanced **ESP Technology** for enhanced signal processing and stunning visual impact. The Champion 42CVI... Winner by a knockout.

CHAMPION VISION INC.

www.championvision.com



CHAMPION 42CVI SHOWN WITH
OPTIONAL SPEAKERS AND STAND

EXCLUSIVELY DISTRIBUTED BY

ELECTROGRAPH
Your Display Technology Distributor™

For more information call
Electrograph Systems, Inc. at 800-776-5768
or visit www.electrograph.com

42CVI 42" Plasma Display

SPECIFICATIONS

Display Type	Multi-Media Monitor
Display Area	36.2" (W) x 20.4" (H)
Display resolution	852 x 480 pixels (Number of Pixels)
Color System	NTSC/PAL/SECAM/NTSC4.43/PAL-M/PAL-N
Computer Compatibility	Up to SXGA 1280 x 1024
Brightness	780 cd/m2 for set (typ. white peak)
Contrast ratio	4000 : 1 (typ)
Amplifier	Digital Amp. 10W+10W RMS (Speakers : Optional)
Dimensions	40.23" (W) x 24.01" (H) x 3.3" (D) (without Handle)
Set Weight	66.13 Lbs.(without Table Top Stand and Speaker)
Package	Single Carton
Packed Dimensions	49.37" (W) x 31.45" (H) x 18.3" (D)
Packed Weight	79.36 Lbs.
Rating Power Supply	120V AC, 50/60Hz
Power Consumption	308W
AC Power Cord	Detachable Type
Viewing Angle	160 Degrees Horizontal/Vertical

CONNECTIONS

PC INPUT	
Signal	Dsub-15
Audio	Stereo Mini
RS232C Input	
Serial	Dsub-9
Wired Remote Control IN	Stereo Mini
RS232C Output	
Serial	Dsub-9
Wired Remote Control Out	Stereo Mini
EXT. Speaker OUT	Push Type

STANDARD INPUTS

INPUT-1	
Signal Input	RCA(Video), DIN4PIN(S-Video)
Audio Input	RCAX2
INPUT-2	
Signal Input	RCA(Video), DIN4PIN(S-Video)
Audio Input	RCAX2
INPUT-4	
Signal Input	RCAX3(Y, Pb/Cb, Pr/Cr)
Audio Input	RCAX2

OPTIONAL INPUTS

Optional Interface Board	Model# CVI42DVI/HDCP-VB
Signal Input-1	DVI-D (with HDCP)
Signal Input-2	BNC(Video), DIN4PIN(S-Video)
Audio Input	RCAX2
Optional Interface Board	Model# CVI42RGB-VB
Signal Input-1	BNCx5(R,G,B,H,V and Y,Pb/Cb, Pr/Cr)
Signal Input-2	BNC(Video), DIN4PIN(S-Video)
Audio Input	RCAX2

REGULATIONS AND CONDITIONS

cUL	
Safety	cUL(UL6500)
Emissions	FCC/DOC ClassA
Operating Temperature	0 to 40(Degree Centigrade)
Storage Temperature	-10 to 50(Degree Centigrade)
Operating Humidity	20 to 80 (%)
Storage Humidity	10 to 90 (%) (No condensation)

ACCESSORIES

O/Manual	(3 languages : English, French, Spanish)
Remote Control	(with Battery)
Wired RC Cable	
AC Cord	

CONTROLS

Plasma Display Unit	
Power	Turn ON/OFF
OK/Input	Go to next/Mode Select
Vol UP/DN, Right/Left	Volume UP/DN, Cursor Right/Left
UP/DN	Cursor UP/DN
Menu	Picture Setup, Sound Setup, PC Mode Adjustment, System Setup, Time Setup, Timer Setup

REMOTE CONTROL

POWER ON-OFF	Turn ON/OFF
INPUT	Select Input
WIDE	Change wide mode
PICTURE	Change picture settings
MENU	Pop up Menu
VOLUME +/- RIGHT	Volume up
VOLUME -/ LEFT	Volume down
UP(MOVE UP)	
DOWN(MOVE DOWN)	
BACK	Return
MUTE	Audio mute
STATUS	Recall current status
ON-OFF	PIP ON/OFF
LOCAT	PIP location
SIZE	PIP size
2-WIN	PAP(Side by side) ON/OFF

OPTIONS

Table top stand	Model# CVI42-DS, 29.4" (L) x 12.6" (W)
Wall mount unit	Model# CVI42-SM
Tilt mount unit	Model# CVI42-PRO
Speakers	Model# CVI42-SR, 3.7" (W) x 20.74" (H) x 3.42" (D)