

frontal view, with optional speaker and base attached






Frontal view, straight on

back view

frontal and back view, with optional pedestal and under speaker attached

PLEASE NOTE: CONTRACTOR SERIES products are display panel ONLY. Speaker and pedestal base are optional accessories that must be ordered separately.

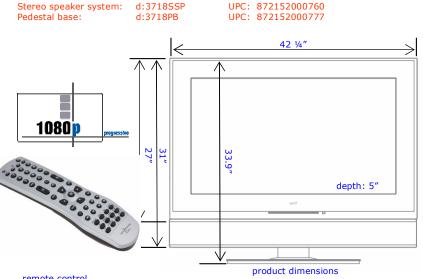

remote control

precision engineered – designed in Tokyo, Japan – factory direct for maximum value



In our progressive search for continued technical and design excellence, we continually modify the look and performance of our products. Therefore, specifications and features are subject to change without notice. copyright - the bydsign company worldwide, all rights reserved

PRO CONTRACTOR SERIES

1080p: everybody's talking about it, yet the benefits are still a mystery to many. Today, most HD is delivered in 720p or 1080i format, but having progressive 1080 compatibility is important to many customers; and bydsign's line of high resolution LCD televisions and displays insure advanced 1080p compliance. But what's more, we build all our contractor grade displays to meet the rugged requirements and sophisticated modular design needed by today's advanced AV installers and professional home theater dealers. We are making the absolute best product for the lowest cost, so rest assured, bydsign is ready to support your business needs!

specification:

ype:	CMO liquid crystal display (LCD
display:	37" measured diagonally
aspect ratio:	16:9 widescreen
video chipset:	PIXELWORKS PW2010/328
resolution:	1920x1080 (UWXGA) 1080p
oixel pitch:	.1615mm X .4845mm
orightness:	550 (nit) cd/m²
contrast:	900:1
viewing angle:	176 degree
response time:	8 ms
TV tuner:	NTSC/M, ATSC, Clear QAM
audio:	10 watts per channel
erminals:	(2) composite video
	(1) S-Video
	(1) VGA D-SUB
	(1) HDMI
	(2) component (Y,Pb/Cb,Pr/Cr)
	(1) audio/video out
	(1) stereo headphone
other:	supports CCD and V-Chip, sleep
	timer, full function remote control
	PIP (VOG), 3:2, 2:2 pull down,
	optional pedestal base.

technical:

power supply:	AC 100 – 240v, 50/60hz
power cons.:	maximum 250 watts
standby cons:	<2 watt
wall mount:	VESA standard
regulatory:	FCC-B, UL 1950, Canadian ICES
	003-B, EPA, CSA, C22.2 no.950

shipping and packaging:

<u>97.0 lb/44 kg</u> 70.5 lb/32 kg

package dim: $(L \times W \times H)$

42.4" X 14.8" X 33.3" 1076mm X 375mm X 845mm

container loading: 20' (64pcs), 40' (132pcs), 40'HQ (198pcs)

US headquarters: 2279 North Rampart Boulevard Las Vegas, NV. 89128 (702) 228-7711 visit us at: www.bydsign.com