# n-ds/gn

frontal view, with optional speaker and base attached





Frontal view, straight on


back view

frontal and back view, with optional pedestal and under speaker attached

PLEASE NOTE: CONTRACTOR SERIES products are display panel ONLY. Speaker and pedestal base are optional accessories that must be ordered separately.

 Stereo speaker system:
 d:4218SSP
 UPC: 872152000739

 Pedestal base:
 d:4218PB
 UPC: 872152000746

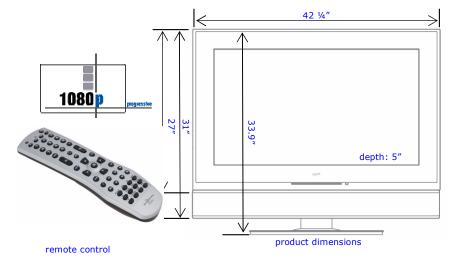

precision engineered - designed in Tokyo, Japan - factory direct for maximum value













In our progressive search for continued technical and design excellence, we continually modify the look and performance of our products. Therefore, specifications and features are subject to change without notice.

 $\label{lem:copyright-the} \mbox{copyright-the bydsign company worldwide, all rights reserved}$ 

# d:4242DII

### PRO CONTRACTOR SERIES

1080p: everybody's talking about it, yet the benefits are still a mystery to many. Today, most HD is delivered in 720p or 1080i format, but having progressive 1080 compatibility is important to many customers; and bydsign's line of high resolution LCD televisions and displays insure advanced 1080p compliance. But what's more, we build all our contractor grade displays to meet the rugged requirements and sophisticated modular design needed by today's advanced AV installers and professional home theater dealers. We are making the absolute best product for the lowest cost, so rest assured, bydsign is ready to support your business needs!

## specification:

c CMO liquid crystal display (LCD)
42" measured diagonally
16:9 widescreen

video chipset: **PIXELWORKS** PW2010/328 resolution: 1920x1080 (UWXGA) 1080p

pixel pitch: .1615mm X .4845mm brightness: 550 (nit) cd/m<sup>2</sup>

contrast: 900:1 viewing angle: 176 degree response time: 8 ms

TV tuner: NTSC/M, ATSC, Clear QAM audio: 10 watts per channel

detachable speaker system (2) composite video

(1) S-Video (1) VGA D-SUB (1) HDMI

(2) component (Y,Pb/Cb,Pr/Cr)(1) audio/video out

(1) audio/video out (1) stereo headphone

supports CCD and V-Chip, sleep timer, full function remote control, PIP (VOG), 3:2, 2:2 pull down,

tilt pedestal base.

### technical:

power supply: AC 100 – 240v, 50/60hz maximum 250 watts

andby cons: <2 watt

wall mount: VESA standard

egulatory: FCC-B, UL 1950, Canadian ICES 003-B, EPA, CSA, C22.2 no.950

### shipping and packaging:

gross weight: 77.2 lb/35 kg product weight: 66.1 lb/30 kg

package dim: 47.0" X 16.3" X 32.7" 1196mm X 415mm X 830mm

ontainer loading:

20' (44pcs), 40' (100pcs), 40'HQ (150pcs)

US headquarters: 2279 North Rampart Boulevard Las Vegas, NV. 89128 (702) 228-7711 visit us at: www.bydsign.com