

LDT521V | LDT651L | LDT651P




52", 65" LCD MONITORS






Leading the evolution of
HIGH-DEFINITION
LCD DISPLAYS

- Native full 1080P HD resolution
- High contrast ratio and brightness for clear and rich colors
- Fast response times for reproducing clear moving images
- Screen saver functions to help expand the life of the LCD panel
- Built-in scheduling functions to automate on/off times per input signals
- Multi-Screen tiling capabilities to create a virtual display wall

LDT521V | LDT651L | LDT651P

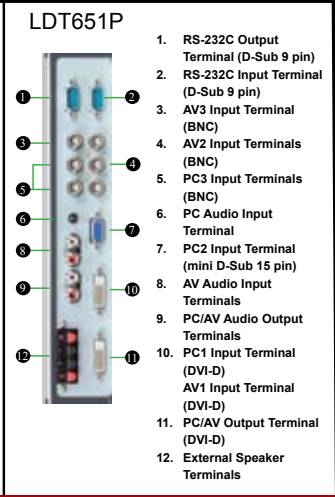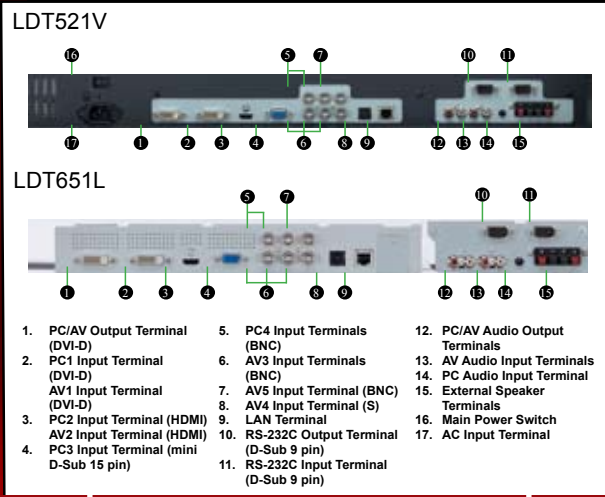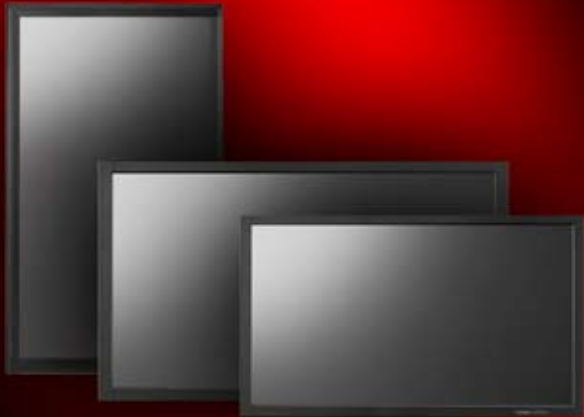

LDT521V | LDT651L | LDT651P



	LDT521V	LDT651L	LDT651P
ORIENTATION	Landscape/Portrait	Landscape	Portrait
VIEWABLE IMAGE SIZE	52.04"	64.53"	64.53"
RESOLUTION	1920 x 1080 (FHD)	1920 x 1080 (FHD)	1920 x 1080 (FHD)
BRIGHTNESS	450 cd/m ²	420 cd/m ²	450 cd/m ²
VIEWING ANGLE	Vertical:176° Horizontal: 176°	Vertical:176° Horizontal: 176°	Vertical:176° Horizontal: 176°
CONTRAST RATIO	1800:1	2000:1	2000:1
WEIGHT (WITHOUT BASE)	86 lbs.	137 lbs.	145 lbs.
DIMENSION (W x H x D in) WITHOUT BASE)	49.4" x 29.2" x 5.9"	61.9" x 36.3" x 5.0"	36.3" x 61.9" x 5.9"
RESPONSE TIME	6ms (Gray to Gray)	6ms (Gray to Gray)	6ms (Gray to Gray)
COLOR	16.7 Million	16.7 Million	16.7 Million
PC ANALOG INPUT CONNECTORS	BNC (R,G,B,H,V) (PC/AV Common), RGB (Mini D-sub 15pin),		
PC DIGITAL INPUT CONNECTORS	DVI-D, HDMI	DVI-D, HDMI	DVI-D
PC OUTPUT CONNECTORS	DVI-D (PC/AV common)	DVI-D (PC/AV common)	DVI-D (PC/AV common)
SYNC INPUT/OUTPUT	Separate (TTL), Composite (TTL), Sync on green,		
AV INPUT CONNECTORS	Composite BNC, Separate (Y/C), <S-TERMINAL>, Component (Y/Pb/Pr<BNC> (PC/AV common)		Composite BNC, Component (Y/Pb/Pr<BNC> (PC/AV common)
AUDIO INPUT CONNECTORS	RCA pin-jack L/R, Stereo mini jack (Analog), HDMI (Digital)	RCA pin-jack L/R, Stereo mini jack (Analog), HDMI (Digital)	RCA pin-jack L/R, Stereo mini jack (Analog)
AUDIO OUTPUT	RCA pin-jack L/R	RCA pin-jack L/R	RCA pin-jack L/R
CONTROL OUTPUT	RS-232C <Mini D-Sub 9 pin>	RS-232C <Mini D-Sub 9 pin>	RS-232C <Mini D-Sub 9 pin>
OPERATING POWER CONSUMPTION	275W	480W	560W
REMOTE CONTROL	Yes	Yes	Yes
PLUG AND PLAY	Yes	Yes	Yes
VESA COMPATIBLE	Yes	Yes	Yes
POWER SUPPLY	AC100-240, 50/60 Hz	AC100-240, 50/60 Hz	AC100-240, 50/60 Hz
ACCESSORIES	VESA Compliant wall mount or floor stands available upon request		
WARRANTY	3-Year Parts and Labor, toll-free 24 x 7 technical support, available on-site warranty repairs and service		



MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.
 Presentation Products Division
 Toll Free: 888.307.0349
 Email: ppdinfo@mdea.com
www.mitsubishi-presentations.com

Canada
 Mitsubishi Electric Sales Canada Inc.
 Information Technologies Group
 Phone: 905.475.7728
www.mitsubishielectric.ca

©2008 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. Microsoft, Windows, and the Windows logo are registered trademarks of Microsoft Corporation. Mac and the Mac logo are trademarks of Apple Computer, Inc. registered in the U.S. and other countries. All other trademarks or registered trademarks are the property of their respective holders.

LITLDT521V651L651P