



60" Plasma HDTV
P60W26P

Shown with Optional Stand Accessory

P60W26P 60" Plasma HDTV Monitor Display



1280 x 720p Resolution

High resolution format produces extremely detailed imagery

800:1 Contrast Ratio

Extremely sharp contrast between light and dark images

600 cd/m² High Brightness

Renders an incredibly bright picture, even in well-lit areas

Image Sticking Minimization

reduces phosphor burn and prolongs the life of the plasma

Aspect Ratio Correction

Intelligent resizing of video and computer images to 16:9 widescreen or 4:3 conventional formats

Intelligent Image Scaling

Faroudja/Sage scan converter converts TV video data to PC formats without distortion or cropping images in either 4:3 or 16:9

RS-232 Control and Discrete IR Controls

Vertical Display Mode

Faroudja DCDi

Video de-interlacing and line doubling

Other Model Available

P60W26H for high altitudes



P60W26P 60" Plasma HDTV Monitor Display


P60W26H for High Altitudes




DIMENSIONS

Front View with Base

Side View with Base

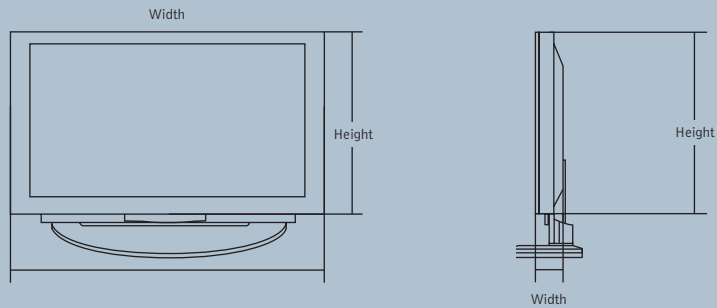

REAR JACK PANEL

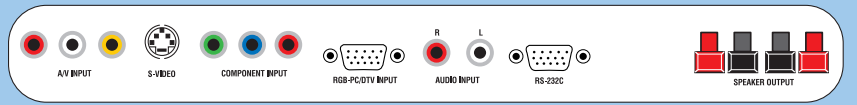

JACK PACK

Hi-Res Component Video	1
Audio Left/Right In/Loop Out	2
Composite In	1
RGB In (15-Pin Type-D Connector)	1
S-Video In	1
RS-232c (9-Pin Connector)	1
IR Jack	1

DIMENSIONS

Cabinet (W x H x D)	57.30" x 34.80" x 3.90"
Weight	154.3 Lbs.
Cabinet w/Packaging (W x H x D)	66.20" x 44.00" x 23.00"
Weight	183 Lbs.

CABINET DESCRIPTION

Finish	Brushed Silver
Power Consumption	650W (Max Audio 700W)
Power Source	120v 60Hz

VIDEO ENHANCEMENTS

Screen Size	60"
Resolution Display	1280 x 720p
Pixel Pitch	0.343 (H) x 1.032 (V)
Aspect Ratio	16:9, 4:3 Zoom
Brightness	600 cd/m ²
Contrast Ratio	800:1
Viewing Angle	160°
Format Conversion	Intelligent Image Scanning
Aspect Ratio Correction	Yes
Scan Converter	Faroudja, Sage
Contrast	Yes
Brightness/Sharpness	Yes
Tint	Yes
Video De-Interlacing/Line Doubling	Faroudja DCDi

DISPLAY

Display Frequency	15.73 to 68kHz (H), 50 to 120Hz (V)
Displayable Colors	16.77M
Color Gradation Filter	Yes
Input Signal	NTSC, HD, VGA, SVGA, XGA, SXGA
Display Modes	Normal, Wide, Zoom
Side Panels (Gray Bars for 4:3 Display)	Yes

AUDIO ENHANCEMENTS

Mono/Stereo/MTS/SAP	Mono/Stereo
Bass/Treble/Balance	Yes
Total Audio (Watts) Output	20W (2 x 10W)

SPECIAL FEATURES

Acoustic Noise Reduction	Yes
Picture In Picture (PIP)	Yes, Split Screen, Zoom
Multilingual Menus	English/Spanish/French/ Portuguese/Korean
1 Level Mute	Yes
Shock Absorbing Glass Damper	Yes, Tilt to 20°
RS-232 Control	Yes
Discrete IR Controls	Yes
Detachable AV Terminal	Yes
Auto-Power On	Yes
Discrete Power Off	Yes
Last Source On	Yes
Image Sticking Minimization	Yes
Display/Mode Change (Vertical)	Yes (P60W26P only)

OUTPUT RESOLUTIONS

NTSC, VGA, SVGA, XGA, SXGA	1280 x 720p
HDTV	1280 x 720p

OPERATING ENVIRONMENTS

Storage Temperature Range	-20°C – 60°C
Storage Humidity Range	<85%
Altitude	0 – 2,000m (P60W26P) 0 – 2,700m (P60W26H)
Operating Temperature	0°C – 40°C & <80% Humidity

REQUIRED APPROVALS

UL, C-UL, NOM	UL, C-UL, FCC (B)
---------------	-------------------

SERVICE/LIMITED WARRANTY

Warranty: Parts/Labor	1 Year/1 Year
MTBF (Approx.)	30K Hours
Customer Service	1-888-865-3026

ACCESSORIES (SUPPLIED)

15-Wire RGB Cable	Yes
Remote Control	SC3261
Power Cord	Yes – 6 Feet

ACCESSORIES (OPTIONAL)

D60DVMS Desktop Stand (W x H x D)	45.7" x 15.5" x 16.3"
Weight	66.8 Lbs.
D60DVSA Speaker (W x H x D) each	5.30" x 34.80" x 3.90"
Weight	5.5 Lbs.
D60DSAS Speaker Stand (W x H x D)	8.70" x 8.60" x 8.70"
Weight	4 Lbs.
Wall Mount	PWMT200

Zenith Electronics Corporation

2000 Millbrook Drive, Lincolnshire, IL 60069
Web: www.zenith.com

Dimensions and weights are approximate. Design and specifications subject to change without notice.

The lightning 'z' and Resolution Revolution are trademarks of Zenith Electronics Corporation. ©2003 Zenith Electronics Corporation. Printed in the USA. Z60260303

