


TOSHIBA

P37LS1

37" LCD FLAT PANEL DISPLAY

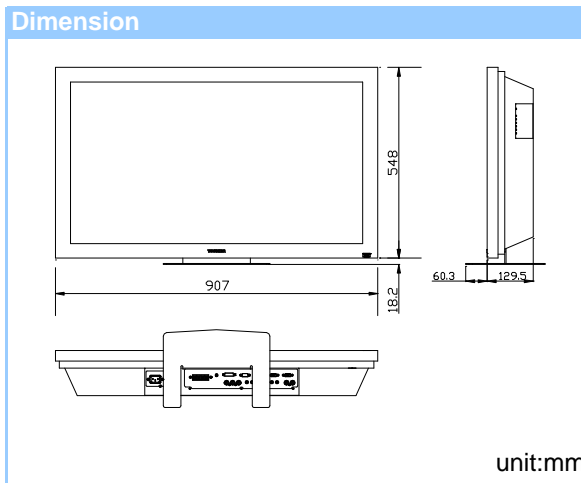

High bright, high contrast color image

High resolution (WXGA) 1,366 X 768

High-speed response

Wide off-axis viewing angle

Long life 50,000 hours

No image burn-in

Specifications

Type	37-inch TFT
Active area	(W)32.27 in. x (H)18.14 in.
Maximum Resolution	1366x768dots
Colors	16.77 million colors
Response time(Typ)	16ms
Brightness	450 cd/?
Contrast ratio	500: 1
Viewing angle	Horizontal: 170° Vertical: 170°
Power voltage	AC100-240V (±10%) , 50/60Hz
Power consumption	TBD
Dimensions (W x H x D)	35.71 x 21.57 x 5.1 (inches)
Weight	TBD
Operating temperature	5- 40?
Operating humidity	20% ~ 80% (No condensation)

Input	Analog RGB	D-sub 15 pin
Connectors	Digital	DVI
	Video	BNC x 1
	Y/Pb/Pr	BNC x 3
	Y/C	S-VIDEO
	Control signal	RS-232C : D-SUB 9PIN
Audio	RCA x 2	
Output	Video	BNC x 1
Connectors	Audio	L/R x 1
Input signal	Video signal	NTSC, PAL
	RGB signal	VGA, SVGA, XGA, SXGA
KEY switch		POWER, INPUT, MENU, DOWN, UP, +, -

?For improvement purpose, data and design may be changed without notice.

?For mounting on a wall or hanging from a ceiling, proper supporting brackets shall be used

?All trademarks are trademarks of their respective owners.

Toshiba Lighting & Technology Corporation
Display Systems Business Development Division
Minami Shinagawa JN BLDG, 2-13, Minami Shinagawa 2-chome,
Shinagawa-ku, Tokyo 140-8660, Japan
Phone:+81-3-5463-8804, Facsimile:+81-3-5463-8840
Web Site:<http://www.tlt.co.jp/tlt/english/video/wideow.htm>

Harison Toshiba Lighting (U.S.A.), Inc.
24922 Anza Dr., Unit F
Valencia, CA 91355 U.S.A.
Phone: (661) 257-7901, Facsimile: (661) 257-6490
sales@toshibadisplays.com
Web Site: <http://www.toshibadisplays.com>